




# M 2280 U

## TECHNICAL DATASHEET M 2280 U



### POWERFULL "U"

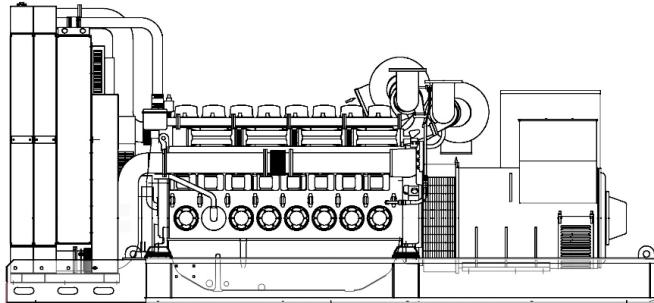

For illustrative purposes only

### ENGINE

Description	MITSUBISHI
Engine model	S16R2-PTAW
Cylinders	16
RPM speed	1500
Cubic capacity	79.90 l
Air intake	Turbocharged
Standard voltage	24 Vdc
Optional voltage	Vdc
Sae	00-21
BMEP	2170 kPa
Cooling	Water
Flywheel P.R.P. Power net	1960.0 kW
Flywheel E.P. Power net	2167.0 kW
Fuel Cons. at 100% (E.P.)	559.1 l/h
Fuel Cons. at 100% (P.R.P.)	498.4 l/h
Fuel Cons. at 75% (P.R.P.)	367.0 l/h
Fuel Cons. at 50% (P.R.P.)	250.6 l/h
Fuel Cons. at 25% (P.R.P.)	138.8 l/h
Electronic regulator	Standard
Precision class	
Oil quantity	290.0 l
Engine Antifreeze capacity	190.0 l
Radiator type	TE
Heat from radiator	757.0 kW
Heat from exhaust	1873.0 kW
Heat from radiation	168.0 kW
Exhaust temperature	0 °C
Cooling air flow	0.0 m³/min
Combustion air flow	191.0 m³/min
Exhaust gas flow	506.0 m³/min
TA Luft	N
TA Luft/2	N
EPA	N
Stage	N

The data contained in this document is nominal and refers to the standard equipped model and is not binding. Visa S.p.A. reserves the right to revise the information without notice per our policy of continuous product development and improvement.

### MAIN DATA

Continuous power (PRP)	<b>2250.00</b> kVA
Continuous power (PRP)	<b>1800.00</b> kW
Emergency power (E.P.)	<b>2400.00</b> kVA
Emergency power (E.P.)	<b>1920.00</b> kW
VAC - HZ - cos(f)	<b>380 - 50 - 0.8</b>

### DIMENSIONS AND WEIGHT

### ALTERNATOR

Description	STAMFORD
Alternator model	S7L1D-H
P.R.P. Power	2250.0 kVA
E.P. Power	2400.0 kW
Connection	Star
Phases	3FN
Winding	312
Terminal Number	6 nr.
IP Protection	23
Electronic regulator	MX341
Precision	1.0 ± %

### BASEFRAME

Model	ST60
Standard tank	0 l
Optional tank	0 l
Oversized tank*	0 l

### CANOPY & SILENCER

Canopy model	SENZA COFANO
Silencer model	MS 65
Silencer outlet diameter	406.0 mm

Standard reference conditions temperature 25°C, altitude 100m asl, relative humidity 30%, atmospheric pressure 100 kPa (1 bar), power factor 0.8 lag, balanced load - no distortion. Fuel consumption is nominal and refers to specific weight 0.850kg/l. Sound power values refer to free field conditions: the installation site may influence the values. Dimensions, weights and other specifications contained in the technical data sheet and related attachments are nominal, subject to tolerances and refer to the model with standard equipment; any optional and additional equipment/accessories can modify weight, dimensions, performance. **P.R.P. Prime Power-Continuous power at variable load:** The power that a genset can supply in continuous service at a variable load for an unlimited number of hours per year while respecting the maintenance intervals established in the environmental conditions stated by the Manufacturer, according to ISO8528-1. The average power supplied over time and any applicable overload must be less than the percentages stated by the Manufacturer. **E.P. - Emergency power:** This is the maximum power that a generating set can deliver for a limited number of hours per year while complying with the maintenance frequency stipulated under the environmental conditions set by the Manufacturer. The number of hours per year is determined by the engine manufacturer. The average power output over time must be lower than the percentages set by the engine manufacturer. Overloading is not allowed.

