

ONIS VISA Zeus Dry Prime

Model: MTZ.DS135.SS

MODEL: Dewatering



ALL PICTURES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

MAIN DATA

Max. flow	300 m³/hour
Max. Max head	50 mwc
Solids handling	25 mm
Suction connection	ANSI 6"
Delivery connection	ANSI 6"
Fuel tank	500 l.

DIMENSIONS AND WEIGHT

Width	1425 mm
Length	2900 mm
Height	2160 mm
Weight	2400 Kg (approx)

The **Zeus Dry Prime** range delivers fast dewatering solutions to sites where a power source is not available. Using a Pioneer pump featuring a 100% mechanical priming system, the Zeus Dry Prime motorpumps quickly prime and reprime, even from dry conditions.

PUMP



Brand	Pioneer
Model	PP66C14 (trimmed to 337 mm)
Pump casing:	Ductile Iron ASTM A536 65-45-12
Enclosed impeller:	CA6NM SS
Pump shaft:	17-4 PH Stainless steel
Bearings:	Dual angular contact drive end bearings
Priming system:	Mechanically Driven Diaphragm Style vacuum pump
Air removal capab.:	85 m ³ /h (50 cfm)
Float box:	Single chamber with positive sealing air separation. Stainless steel float ball and linkage
Discharge Check Valve:	Swing Style – ductile iron with Buna-n Disc

ENGINE

**CERTIFIED
STAGE V**



Brand	HYUNDAI (DOOSAN)
Model	D34
Gross Power	99 kW @ 2600 rev/min
Displacement	3,4 l.
N° cylinders	4
Cooling system	Water cooled
Exhaust emission	Stage V

CONTROL PANEL

Controller model NT5 by Nettuno




- Auto start/stop system
- Switch manual – 0 – Automatic
- Tachometer
- Hour counter
- Warning lights "oil and engine temperature"
- Warning light "auto stand-by"
- GPRS – VISA Web supervisor & APP
- Geolocation and Geo-fencing
- Soot / Ash filter control
- Two float switches (min/max level) support for automatic operation

The data contained in this document is nominal and refers to the standard equipped model and is not binding. Visa S.p.A. reserves the right to revise the information without notice.




MULTI-SPEED PERFORMANCE CURVE

World-class performance: Using high efficiency pumps and top performance diesel engines, the Zeus Dry Prime units offer high performance and efficiency to ensure predictable and timely job completion with minimal operating expenses

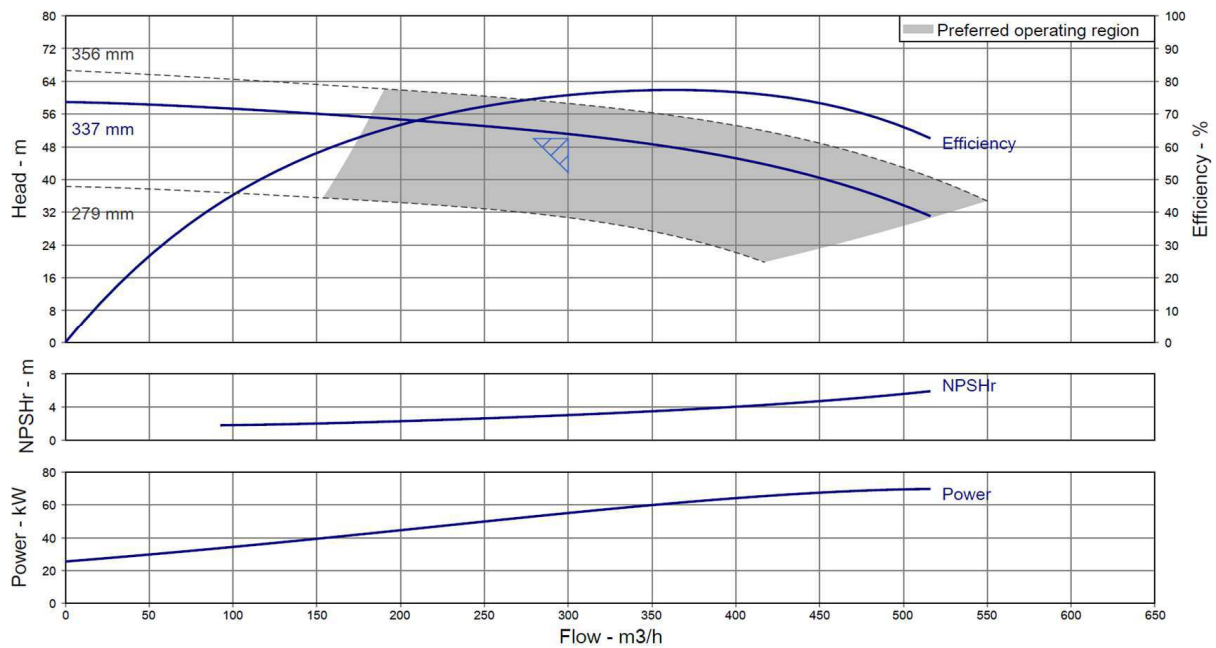

The data contained in this document is nominal and refers to the standard equipped model and is not binding. Visa S.p.A. reserves the right to revise the information without notice.

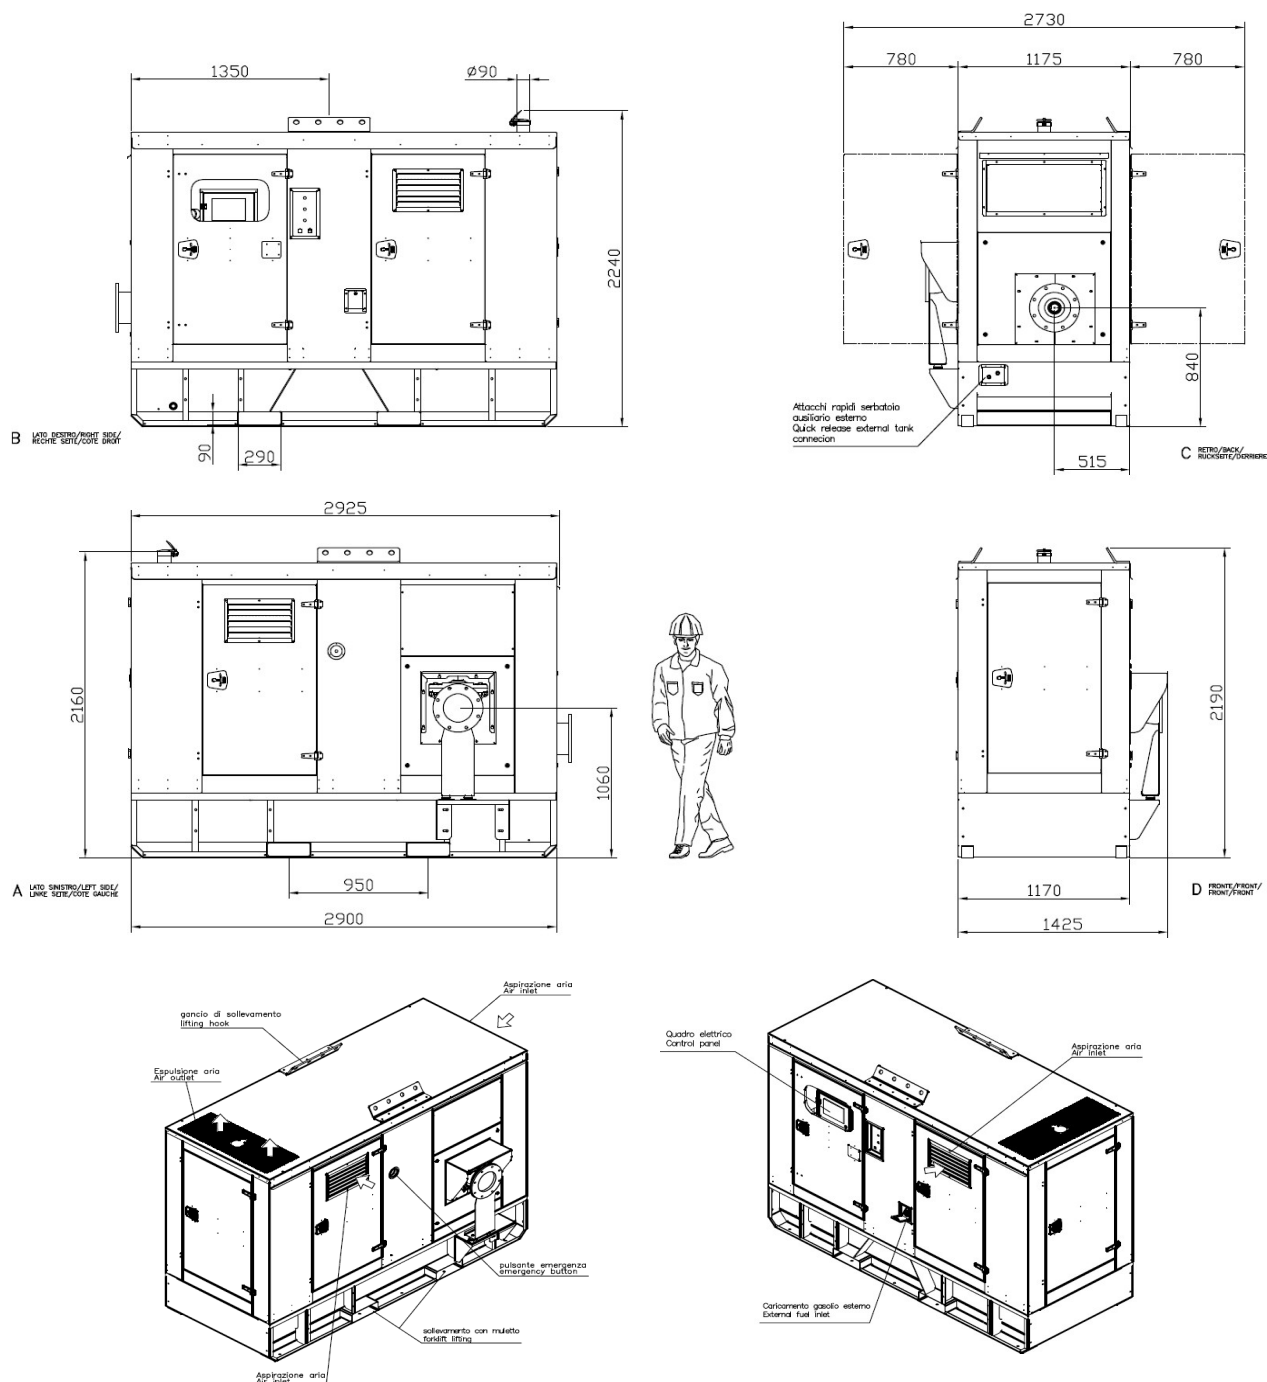PRELIMINARY DIMENSIONS

Nettuno motorpumps designed & built by VISA SPA • Complete in-house design & production

- Over 45 years of experience in the motorpumps sector
- In-house extensive testing facility
- Modern & functional design
- Durable materials
- Customizations available