

ONIS VISA Zeus Dry Prime

Model: MTZ.DS135.SS



| ALL PICTURES SHOWN | ARE FOR ILLUSTRATIO | ON PURPOSE ONLY |
|--------------------|---------------------|-----------------|
| | | |

| MAIN DATA | |
|---------------------|---------------|
| Max. flow | 938 m3/hour |
| Max. Max head | 54 mwc |
| Solids handling | 80 mm |
| Suction connection | DN200 |
| Delivery connection | DN200 |
| Fuel tank | 500 ı. |

| DIMENSIONS AND WEIGHT | | |
|-----------------------|----------------|--|
| Width | 1425 mm | |
| Length | 2925 mm | |
| Height | 2240 mm | |
| Weight | ** Kg (approx) | |

The **Zeus Dry Prime** range delivers fast dewatering solutions to sites where a power source is not available. Using a VISA pump featuring a 100% mechanical priming system, the Zeus Dry Prime motorpumps quickly prime and reprime, even from dry conditions.

PUMP



| Brand | VISA |
|-------|-------|
| Model | HG300 |

Pump casing: Cast Iron G25

Impeller: Cast Iron GS500 - Type: 2-blade spiral smooth flow open

impeller

Pump shaft: Stainless steel [39NiCrMo3]

Priming system: Mechanically Driven Diaphragm Style vaccum pump

Air removal capab.: 50 m3/h (30 cfm)

Float box: Single chamber with positive sealing air separation. Stainless

steel float ball and linkage

Discharge Check Valve: Swing Style

ENGINE



| Brand | HYUNDAI (DOOSAN) |
|------------------|-----------------------|
| Model | D34 |
| Gross Power | 101 kW @ 2600 rev/min |
| Displacement | 3,4 I. |
| N° cylinders | 4 |
| Cooling system | Water cooled |
| Exhaust emission | Stage V |

CONTROL PANEL

Controller model NT5 by Nettuno



Auto start/stop system

 ${\sf Switch\ manual-0-Automatic}$

Tachometer

Hour counter

Warning lights "oil and engine temperature"

Warning light "auto stand-by"

GPRS – VISA Web supervisor & APP

Geolocation and Geo-fencing

Soot / Ash filter control

Two float switches (min/max level) support for automatic operation


The data contained in this document is nominal and refers to the standard equipped model and is not binding. Visa S.p.A. reserves the right to revise the information without notice

ONIS VISA Zeus Dry Prime

Model: MTZ.DS135.SS

MULTI-SPEED PERFORMANCE CURVE

World-class performance: Using high efficiency pumps and top performance diesel engines, the Zeus Dry Prime units offer high performance and efficiency to ensure predictable and timely job completion with minimal operating expenses

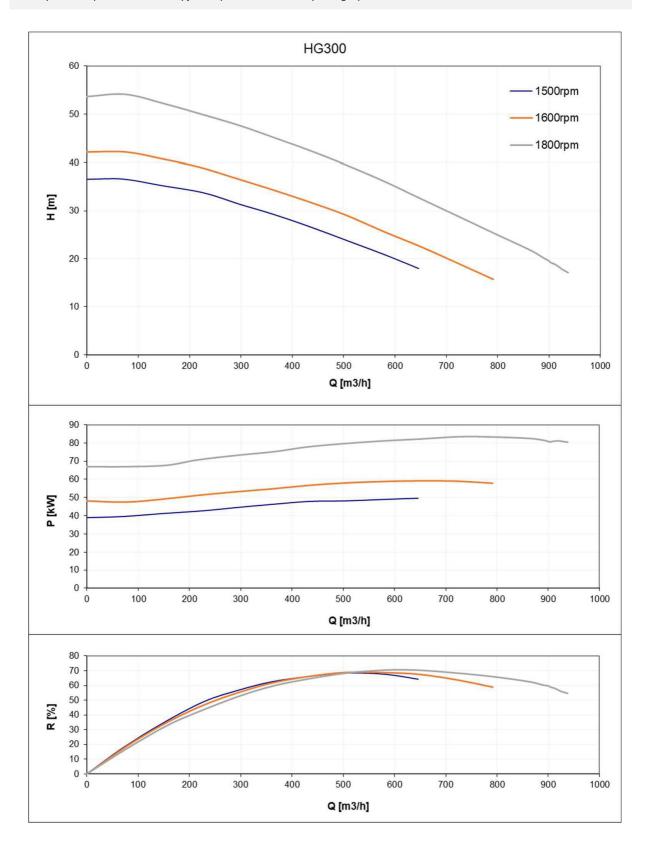


The data contained in this document is nominal and refers to the standard equipped model and is not binding. Visa S.p.A. reserves the right to revise the information without notice.



ONIS VISA Zeus Dry Prime

Model: MTZ.DS135.SS

PRELIMINARY DIMENSIONS

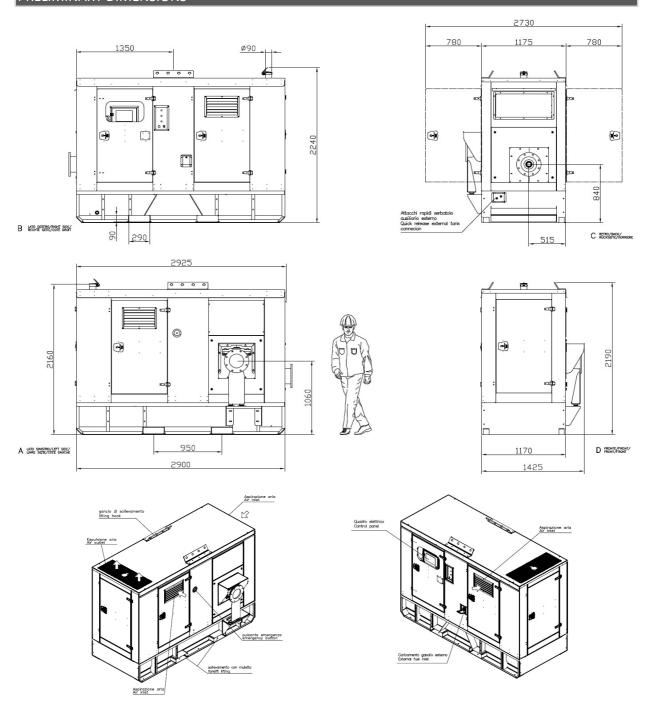

Nettuno motorpumps designed & built by VISA SPA • Complete in-house design & production

- Over 45 years of experience in the motorpumps sector
- In-house extensive testing facility
- Modern & functional design
- · Durable materials
- · Customizations available

The data contained in this document is nominal and refers to the standard equipped model and is not binding. Visa S.p.A. reserves the right to revise the information without notice