

ONIS VISA Zeus Dry Prime

Model: MTZ.F100.SS



ALL PICTURES SHOWN	ARE FOR ILLUSTRATIO	N PLIRPOSE ONLY

MAIN DATA	
Max. flow	718 m3/hour
Max. Max head	35 mwc
Solids handling	80 mm
Suction connection	DN200
Delivery connection	DN200
Fuel tank	500 ı.

DIMENSIONS AND WEIGHT		
Width	1425 mm	
Length	2925 mm	
Height	2240 mm	
Weight	** Kg (approx)	

The **Zeus Dry Prime** range delivers fast dewatering solutions to sites where a power source is not available. Using a VISA pump featuring a 100% mechanical priming system, the Zeus Dry Prime motorpumps quickly prime and reprime, even from dry conditions.

PUMP



Brand	VISA
Model	HG200

Pump casing: Cast Iron G25

Impeller: Cast Iron GS500 - Type: 2-blade spiral smooth flow open

impeller

Pump shaft: Stainless steel [39NiCrMo3]

Priming system: Mechanically Driven Diaphragm Style vaccum pump

Air removal capab.: 50 m3/h (30 cfm)

Float box: Single chamber with positive sealing air separation. Stainless

steel float ball and linkage

Discharge Check Valve: Swing Style

ENGINE



Brand	FPT INDIUSTRIAL
Model	FPT - 100HP@2200 RPM
Gross Power	74 kW @ 2200 rev/min
Displacement	4,5 l.
N° cylinders	4
Cooling system	Water cooled
Exhaust emission	Stage IIIA

CONTROL PANEL

Controller model NT5 by Nettuno

Nei Tuno

Sind-step pro

Single typed

Singl

Auto start/stop system

 ${\sf Switch\ manual-0-Automatic}$

Tachometer

Hour counter

Warning lights "oil and engine temperature"

Warning light "auto stand-by"

GPRS – VISA Web supervisor & APP

Geolocation and Geo-fencing

Soot / Ash filter control

Two float switches (min/max level) support for automatic operation


The data contained in this document is nominal and refers to the standard equipped model and is not binding. Visa S.p.A. reserves the right to revise the information without notice.

ONIS VISA Zeus Dry Prime

Model: MTZ.F100.SS

MULTI-SPEED PERFORMANCE CURVE

World-class performance: Using high efficiency pumps and top performance diesel engines, the Zeus Dry Prime units offer high performance and efficiency to ensure predictable and timely job completion with minimal operating expenses

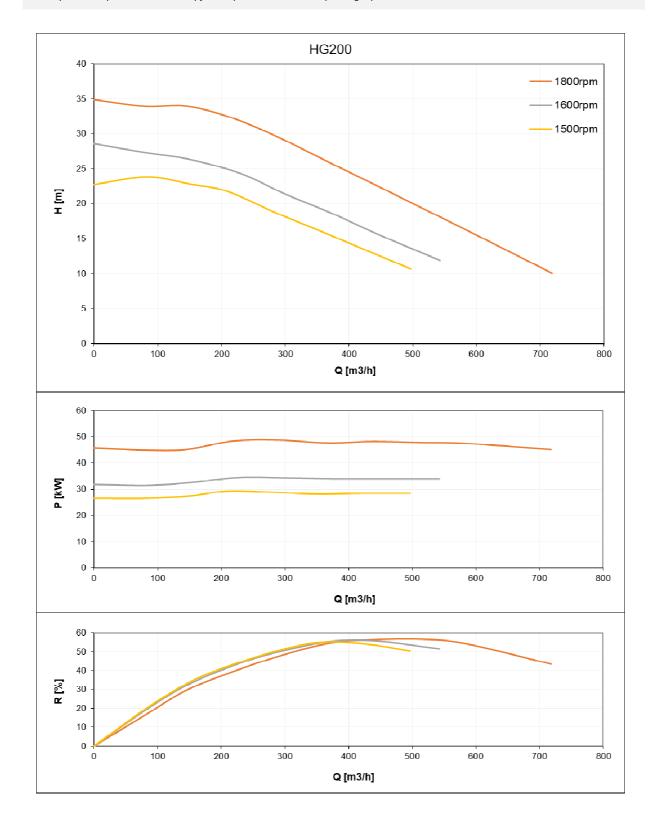


The data contained in this document is nominal and refers to the standard equipped model and is not binding. Visa S.p.A. reserves the right to revise the information without notice





ONIS VISA Zeus Dry Prime

Model: MTZ.F100.SS

PRELIMINARY DIMENSIONS

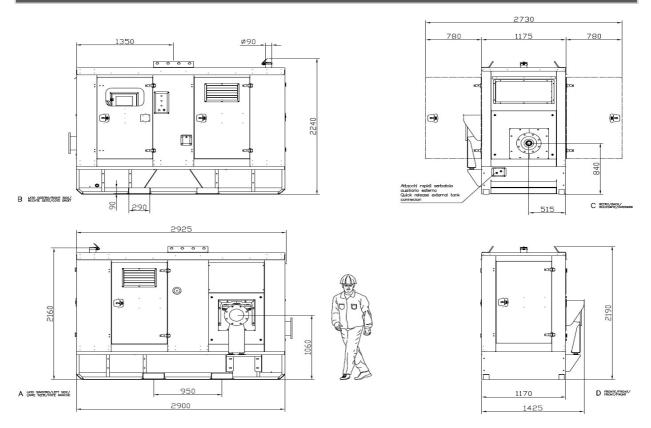



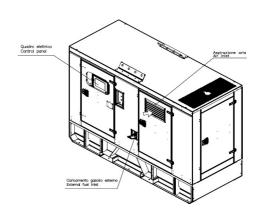

Nettuno motorpumps designed & built by VISA SPA • Complete in-house design & production

- Over 45 years of experience in the motorpumps sector
- In-house extensive testing facility
- Modern & functional design
- · Durable materials
- · Customizations available

The data contained in this document is nominal and refers to the standard equipped model and is not binding. Visa 5.p.A. reserves the right to revise the information without notice