

## **VM5 CONSTRUCTION RANGE**

## MODEL: DS 35 SGVM

## ENCLOSURE TYPE: VM5 35



MAIN DATA		
Continuous Power (PRP)	30.0 kVA	
Continuous Power (PRP)	24.0 kW	
Stand-by Power (LTP)	32.0 kVA	
Stand-by Power (LTP)	25.6 kW	
Voltage · Frequency · Power Factor	400V·50Hz·0.8cosφ	
Sound pressure 7 metres (±3dBA)	62.0 dBA	
DIMENSIONS AND WEIGHT		
Width	980 mm	
Length	2250 mm	
Height	1430 mm	
Weight (full fuel tank)	1290 kg	
VM5 RANGE STANDARD EQUIPMENT High-capacity Fuel Tank + Leak sensor + Tank cap with key,		

Strong Forklift pockets & Central lifting hook, Battery disconnector & Adjustable earth fault relay, GSM module + Antenna & Visa WebSupervisor App

## **GENERAL DATA**

ENGINE		
Engine brand	DOOSAN	
Engine model	D18 STAGE V	
Cylinders	3	nr
Speed	1500	r.p.m.
Cubic capacity	1.79	I
Air intake	Turbocharged	
Standard voltage	12	Vdc
Optional voltage	-	Vdc
Sae	4-10	
BMEP	-	kPa
Cooling	Water	
Flywheel P.R.P. Power	25.0	kW
Flywheel Stand-by Power	28.0	kW
Fuel Cons. at 100% (L.T.P.)	7.9	l/h
Fuel Cons. at 100% (P.R.P)	7.4	l/h
Fuel Cons. at 75% (P.R.P.)	5.6	l/h
Fuel Cons. at 50% (P.R.P.)	3.8	l/h
Fuel Cons. at 25% (P.R.P.)	2,2	l/h
Engine speed regulator	Electronic	
Precision class	G2	
Oil quantity	6.3	1
Engine Antifreeze capacity	8.4	I
Heat from radiator	29.7	kW
Exhaust temperature	750	°C
Emissions	STAGE V	EU

ALTERNATOR		
Alternator brand	STAMFORD	
Alternator model	SOL 2-P	
P.R.P. Power	30.0	kVA
L.T.P. Power	33.0	kVA
Connection	Series Star 3F+N	
Terminal Number	12	nr
IP Protection	23	
Electronic regulator	AS540	
Precision	1.0	+/-%
AUTONOMY		
Fuel tank	270	I
Hours of operation at 75% of load	48	h
CONTROL PANEL		
Controller Brand	COMAP	


Controller Brand	COMAP
Controller Model	AMF 25 - IL4
Socket kit	1x 63A; 1x 32A; 1x 16A; 1x schuko



Standard reference conditions: temperature 25°C, altitude 100m asl, relative humidity 30%, atmospheric pressure 100 kPa (1 bar), power factor 0.8 lag, balanced load - non distortional. Fuel consumption is nominal and refers to specific weight 0,850kg/l. Sound power values refer to free field conditions: the installation site may influence the values. Dimensions, weights and other specifications contained in the technical data sheet and related attachments are nominal, subject to tolerances and refer to the model with standard equipment; any optional and additional equipment/accessories can modify weight, respecting the maintenance. P.R.P. Prime Power-Continuous power at variable load: The power that a genest can supply in continuous service at a variable load for an unlimited number of hours per year while respecting the maintenance intervals established in the environmental conditions stated by the Manufacturer. according to ISO8528-1. The average power supplied over time and any applicable overload intervals established in the environmental conditions stated by the Manufacturer. LT.P. Limited-time running power-Limited power: The maximum power that a genset can supply for a limited time respecting the maintenance intervals established in the environmental conditions stated by the S828-1. The number of hours per year is stated by the Manufacturer. Overload is not permitted.

The data contained in this document is nominal and refers to the standard equipped model and is not binding. Visa S.p.A. reserves the right to revise the information without notice per our policy of continuous product development and improvement



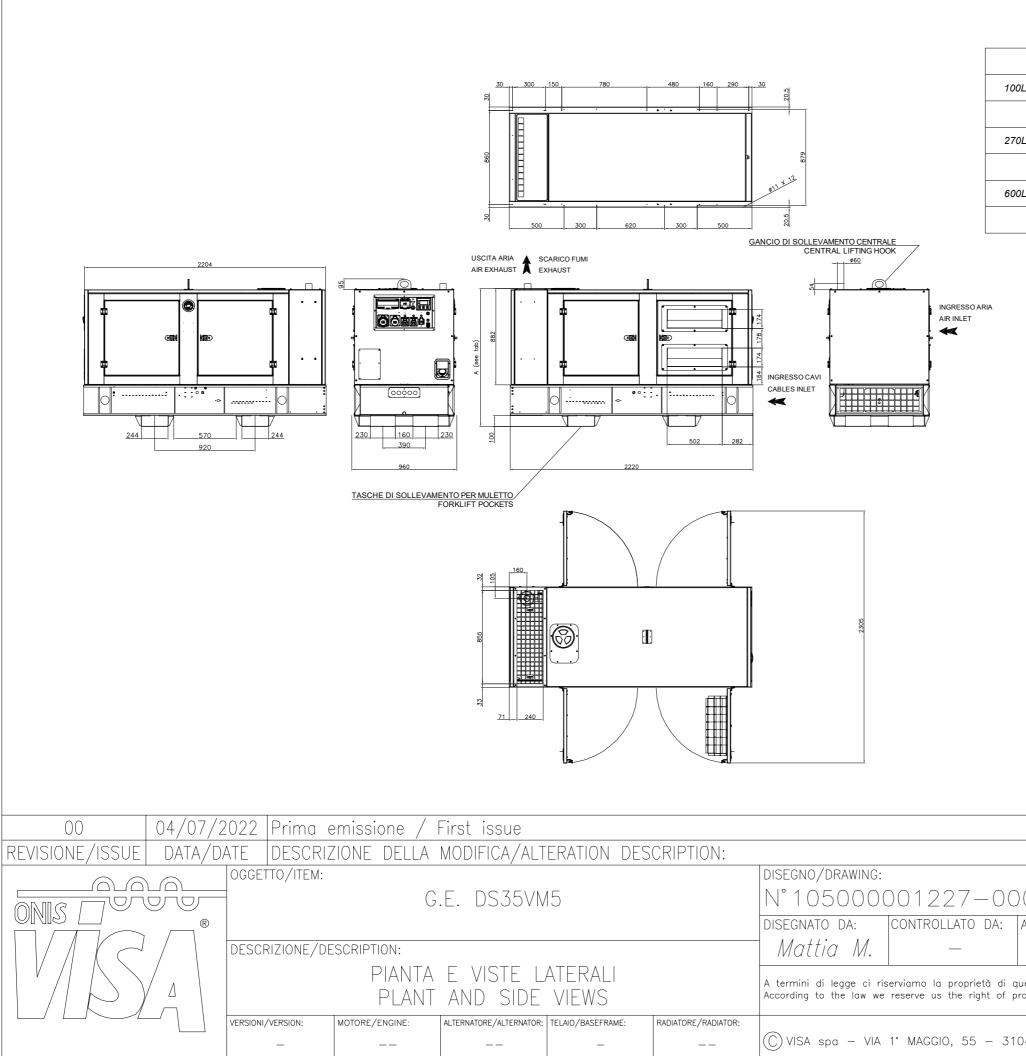

VERSION	Α
L BOUNDED TANK	1258
270L TANK	1378
L BOUNDED TANK	1438
600L TANK	1574
L BOUNDED TANK	1698
1000L TANK	1793

	NOTE/NOTES:	
0-00		
APPROVATO	DA:	TAV./SHEET:
		tav./sheet: 01/01
uesto disegno con divieto di riprodurlo. roperty. The law forbids the reproduction.		
043 FONTANELLE TV – ITALY		